






RC 50-20

Curve n.: T-1064b

Ref.Speed (rpm) 2.950

Valid from: 15/set/21

| | | | | | |
|----------------------------------|------------------------|-----------------------|-----------------------------|----------|-------|
| Max Diameter (mm): 205 | Min Diameter (mm): 160 | Impeller Type: VORTEX | NS: 20 | SSS: 117 | GD2:0 |
| Density (kg/dm ³): 1 | Viscosity (cp): 1 | Fluid: Water 20°C | Norm.: UNI EN ISO 9906:2012 | | |

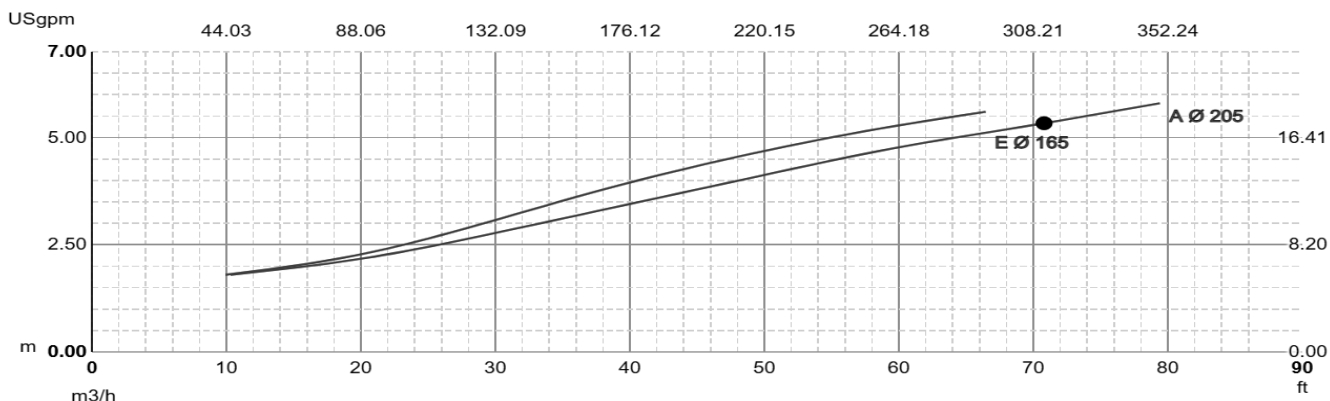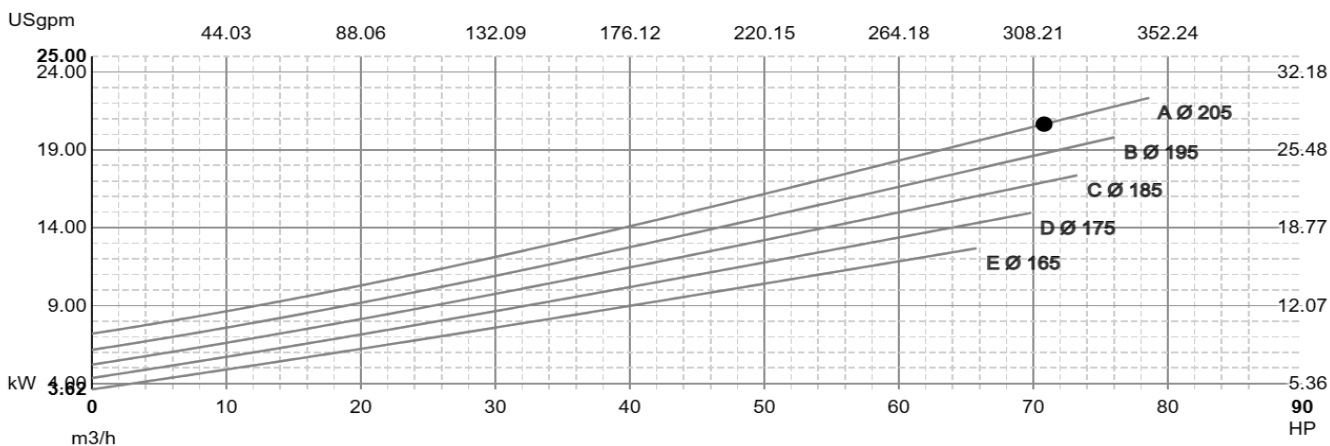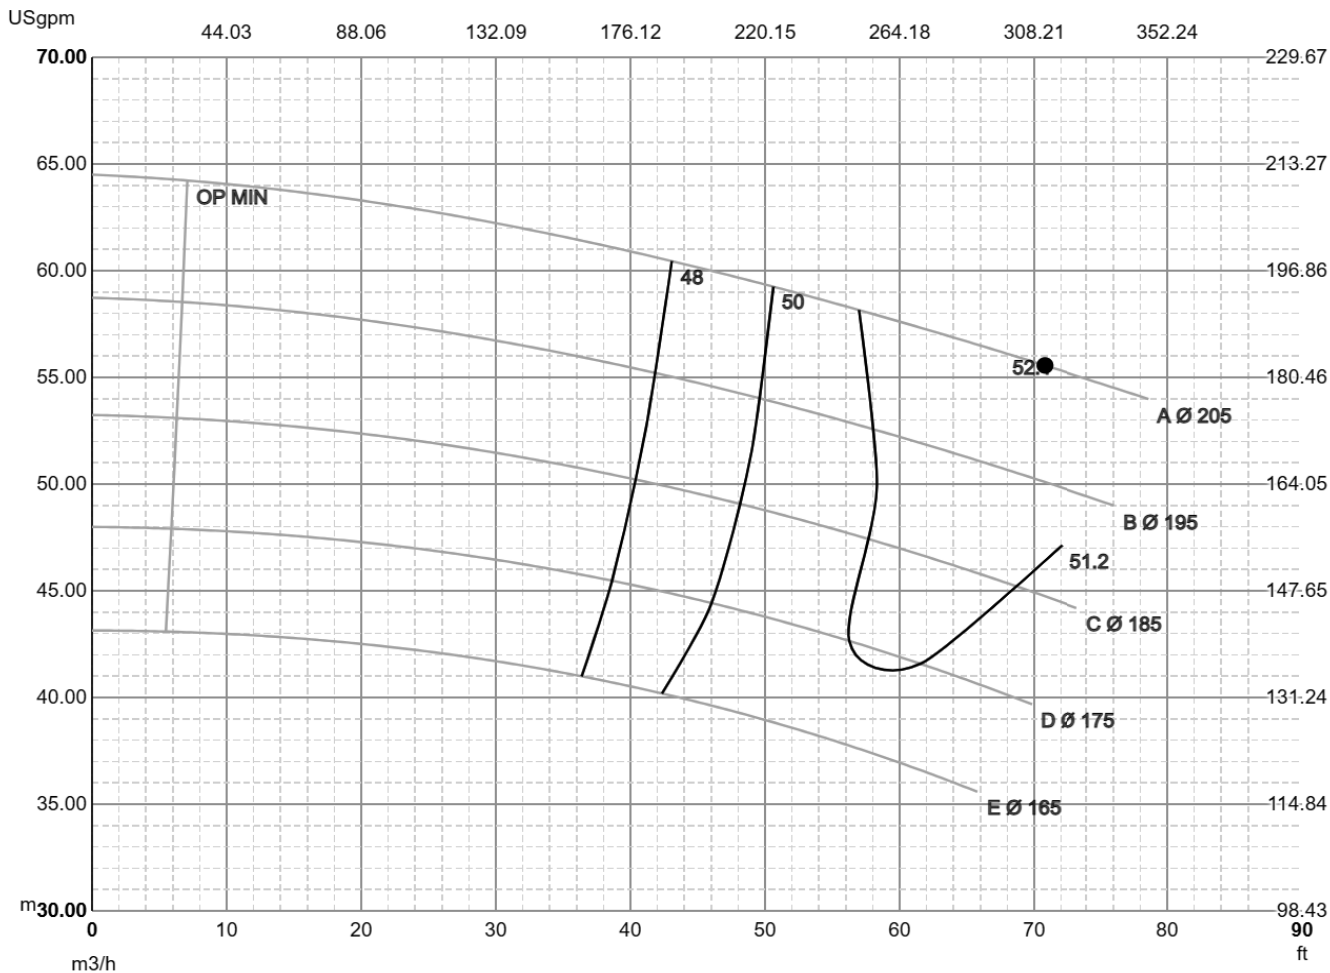

Notes Pump performance may depending on material. Tested pump: CF8M
 Cast Iron and Special Alloys: -7% on Head / +7% on Power