


Performance curves

The following performance curves were obtained by measuring on test equipment at TACMINA under the following conditions. These performance curves may differ slightly depending on various on-site conditions and product differences.

Measure the discharge volume under actual operating conditions, and set the frequency according to the performance curve that is obtained.

■ BPL-VTCE/VTCE-FW/MW


Conditions: clean water, room temperature

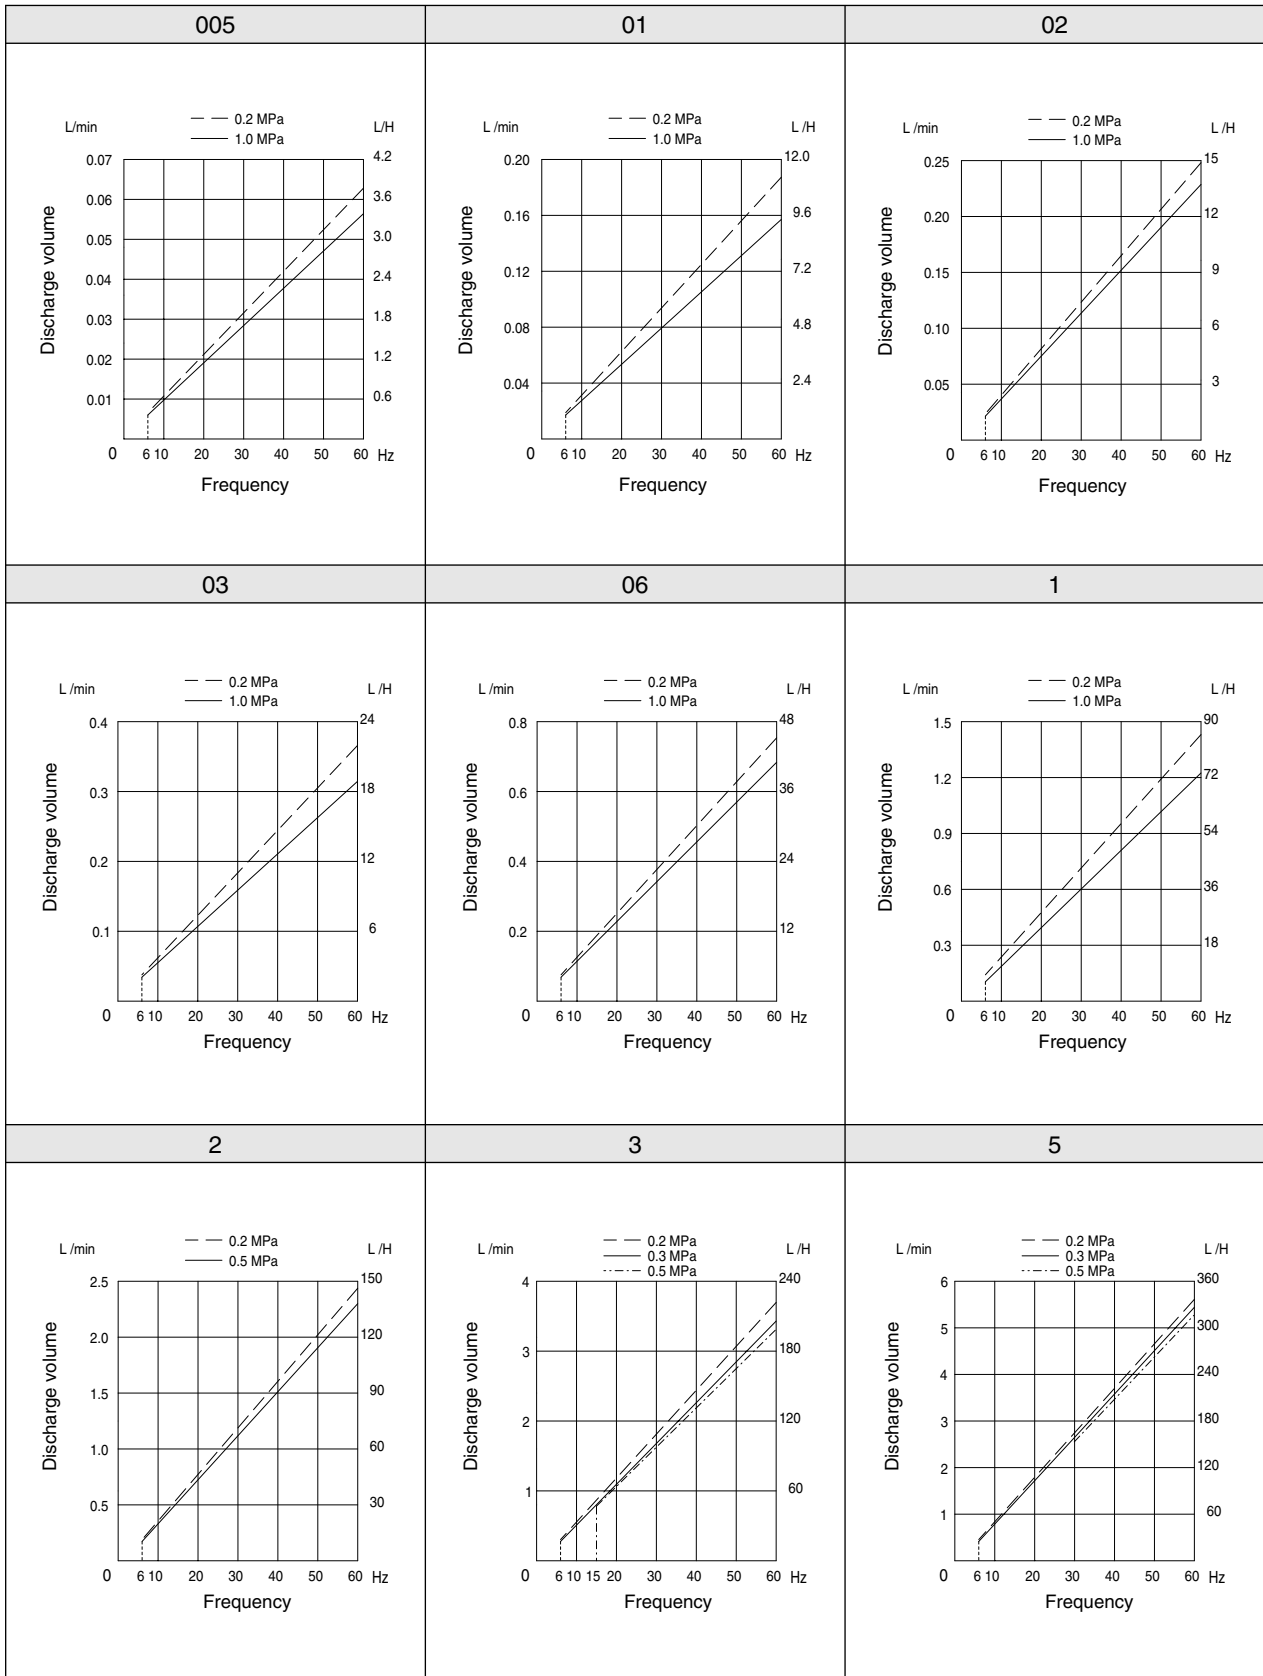

Performance curves

■ BPL-STST-FW/UW

Conditions: clean water, room temperature

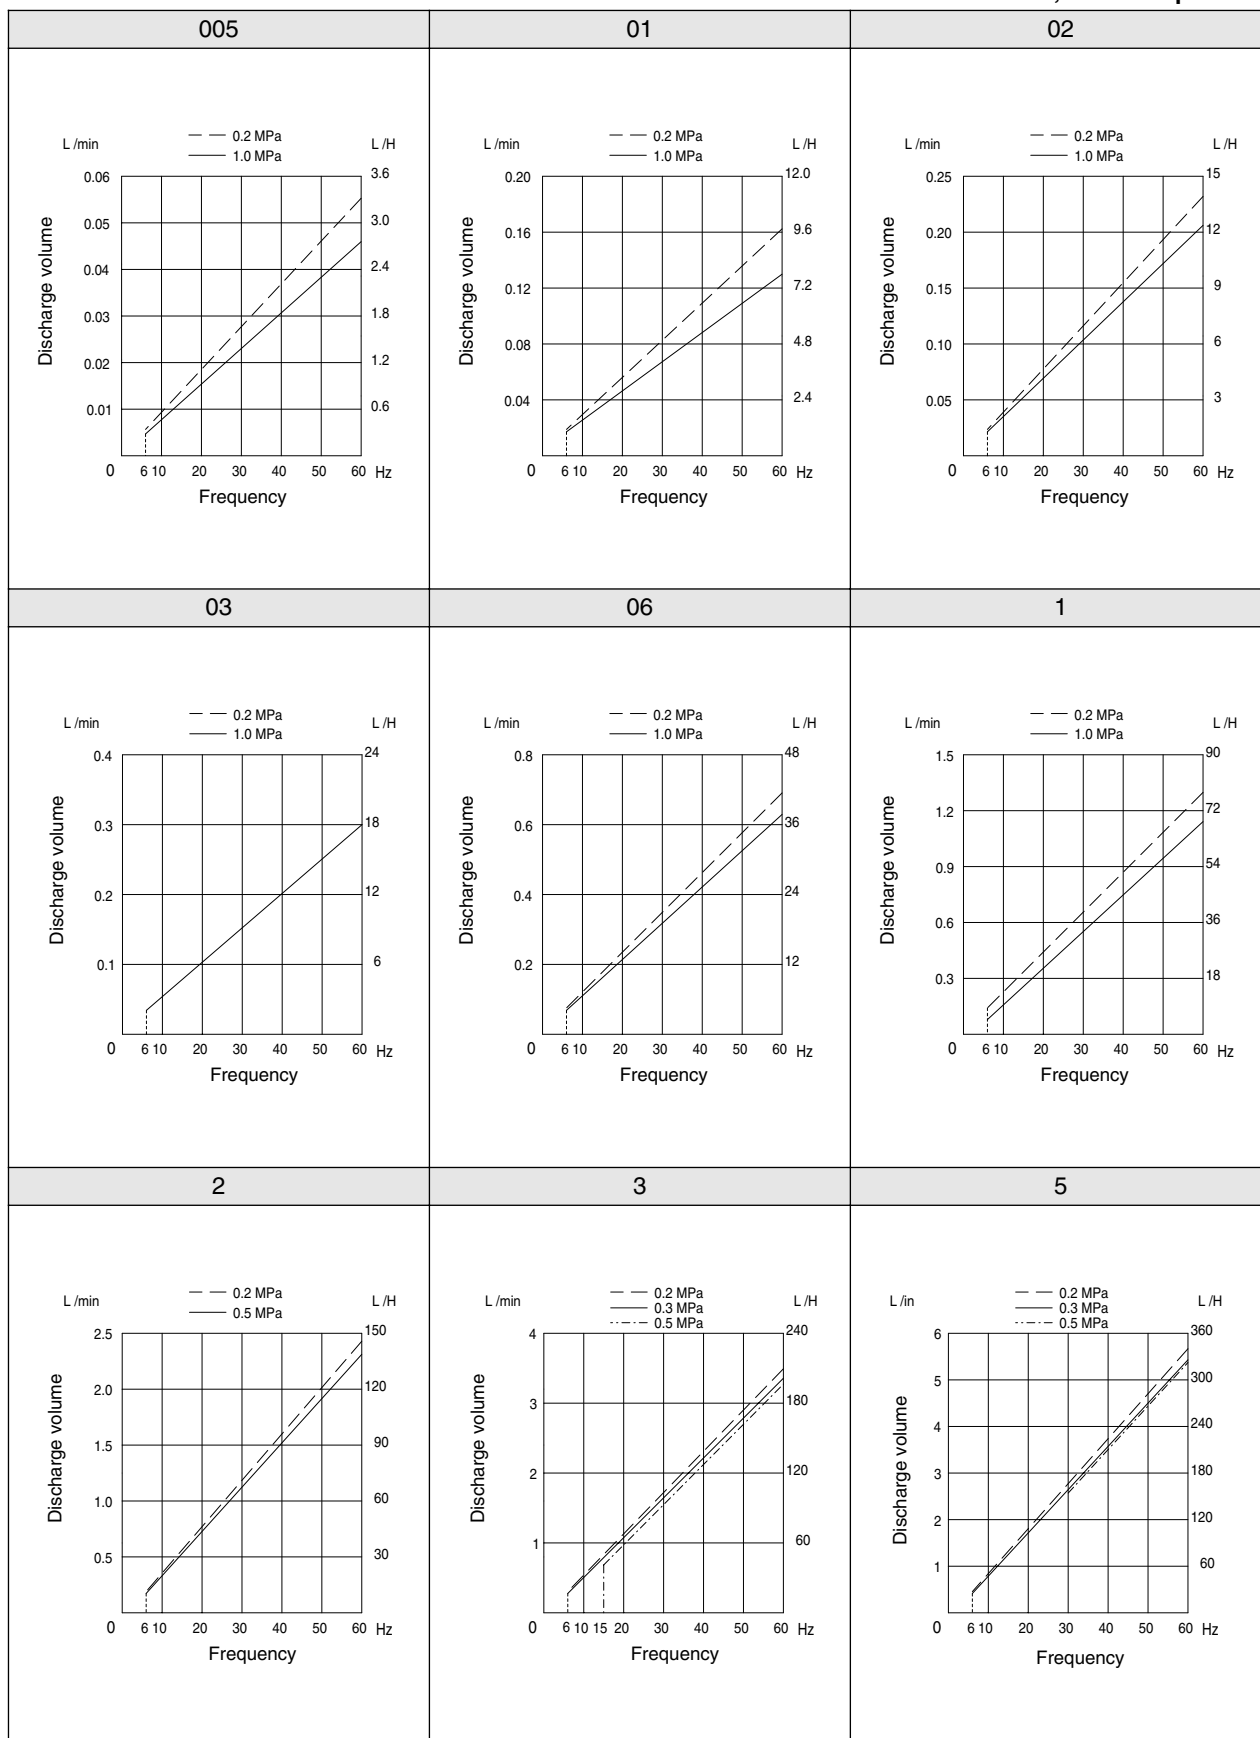


Specifications

Performance curves

■BPL-STST-HW


Conditions: clean water, room temperature

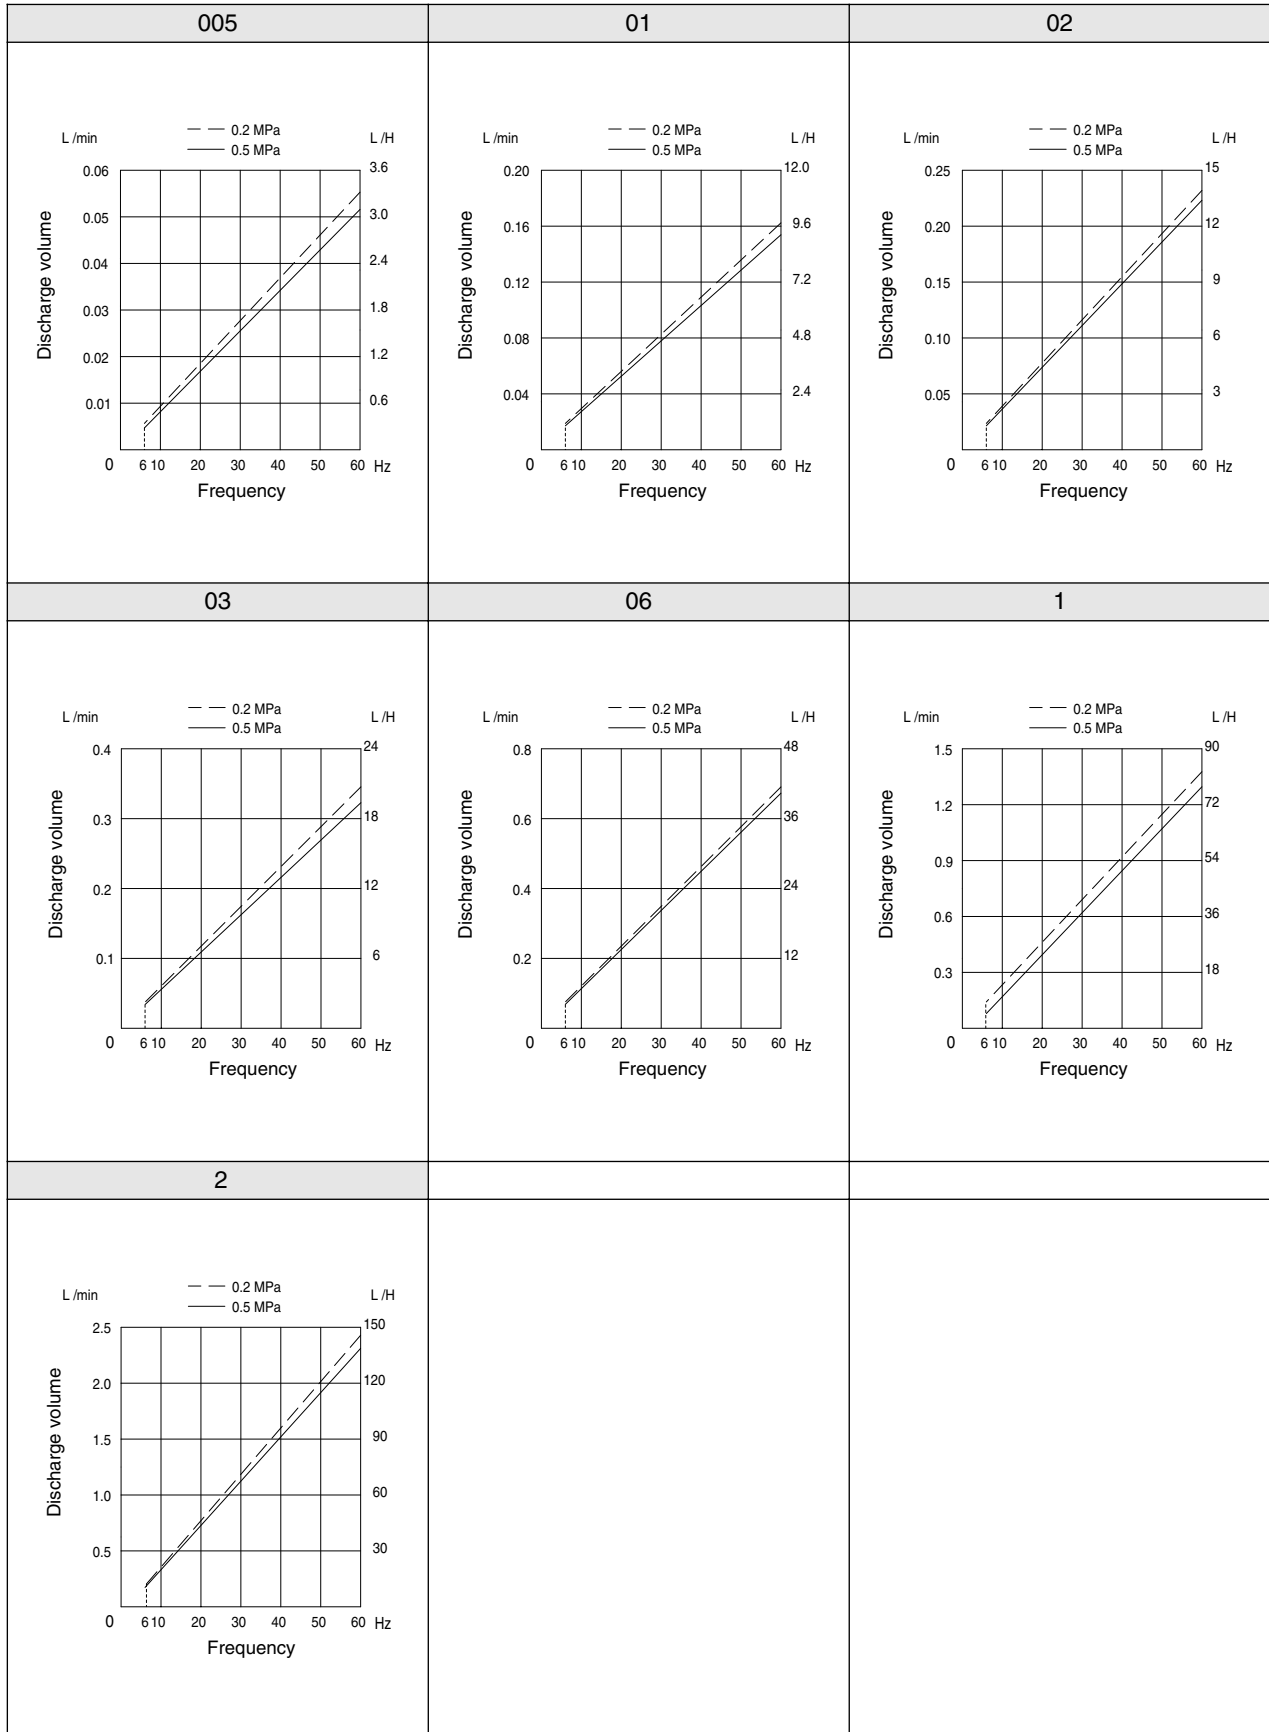

Performance curves

■ BPL-VT6E/VT6F-HV/FV

Conditions: clean water, room temperature

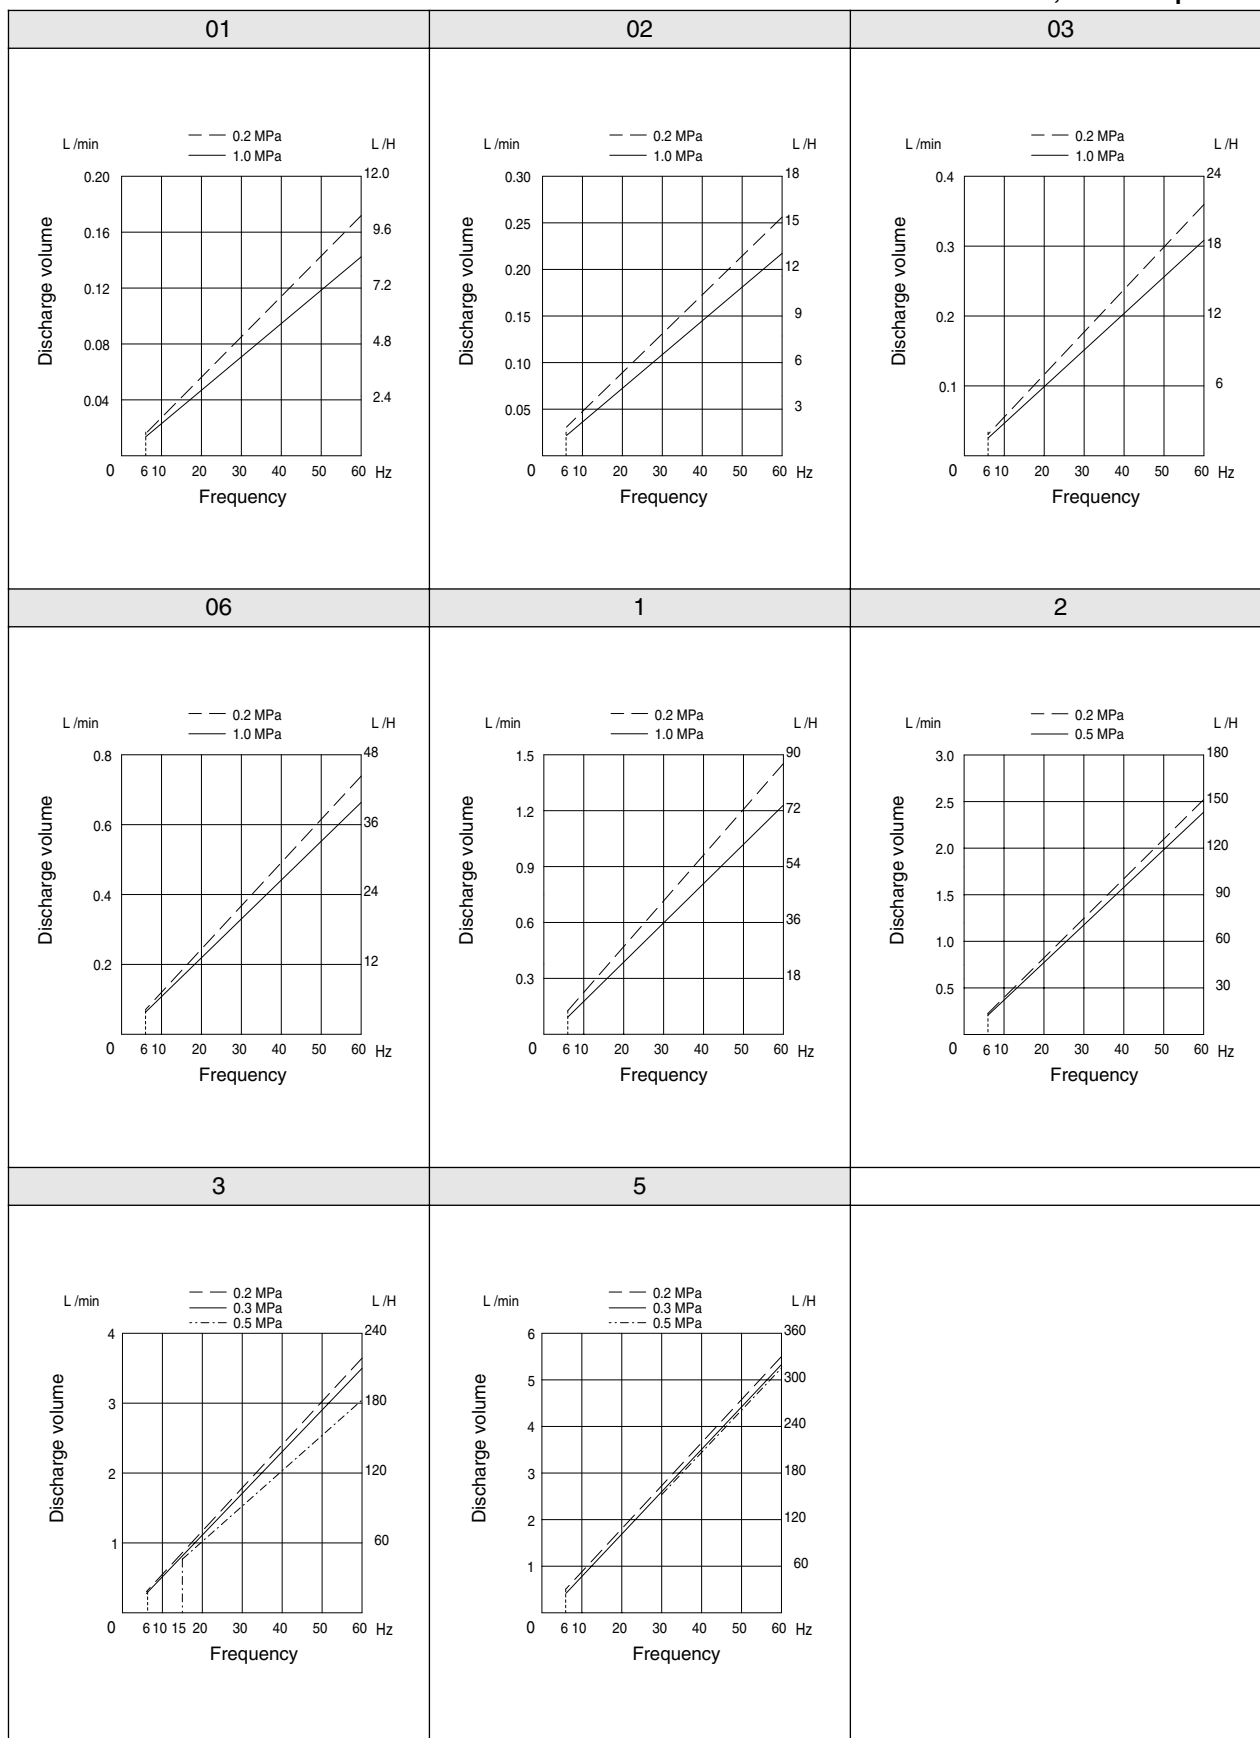

Specifications